




KUBICA K6300 Bisagra aplicable en puertas de interior, puertas al ras del marco


Hinge applicable for interior doors, flush doors

K Krona
Koblenz

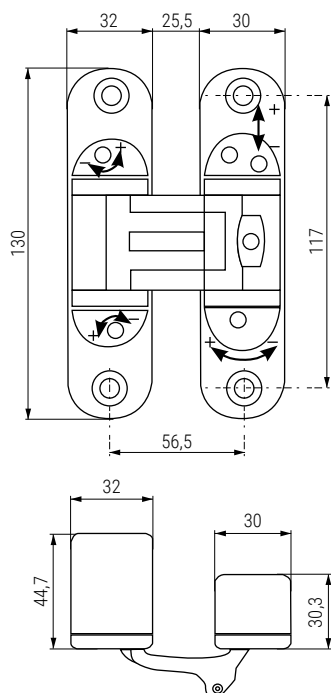

PUERTA
DOOR

JAMBA
JAMB

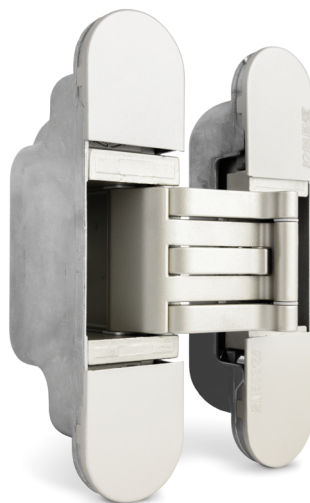

Bisagra desplazada
Offset hinge



Instrucciones de montaje
Assembly Instructions



Vídeo de montaje
Assembly video

- Bisagra de 5 pivotes regulables a través de 3 ejes:
 - Horizontal +3mm. / -2mm.
 - Vertical ±3mm.
 - Plano ±1mm.
- Las regulaciones se deben efectuar en todas las bisagras de la puerta.
- Bujes antidesgaste sin necesidad de lubricación ni mantenimiento.
- Ideal para marcos de madera, acero y aluminio.
- Tapas de aluminio.
- Si el grosor de la puerta fuese superior a 45mm., se podría colocar con el eje no centrado.

- Hinge with 5 pivots adjustable through 3 axes:
 - Horizontal +3 / -2mm.
 - Vertical ±3mm.
 - Flat ±1.5mm.
- Adjustments must be made to all door hinges.
- Anti-wear bushings without the need for lubrication or maintenance.
- Ideal for wood, steel and aluminum frames.
- Aluminum covers.
- If the door thickness exceeds 45mm, it can be installed with the hinge pin off-center.

Código Code	Material	Acabado Finish	
797.102	zamak/zinc alloy	níquel sat/satin nickel	3/12
797.104	zamak/zinc alloy	negro/black	3/12

