


KUBICA K6200 Bisagra para puertas de interior y puertas enrasadas
Hinge for interior doors and flush door



Instrucciones de montaje
Assembly Instructions

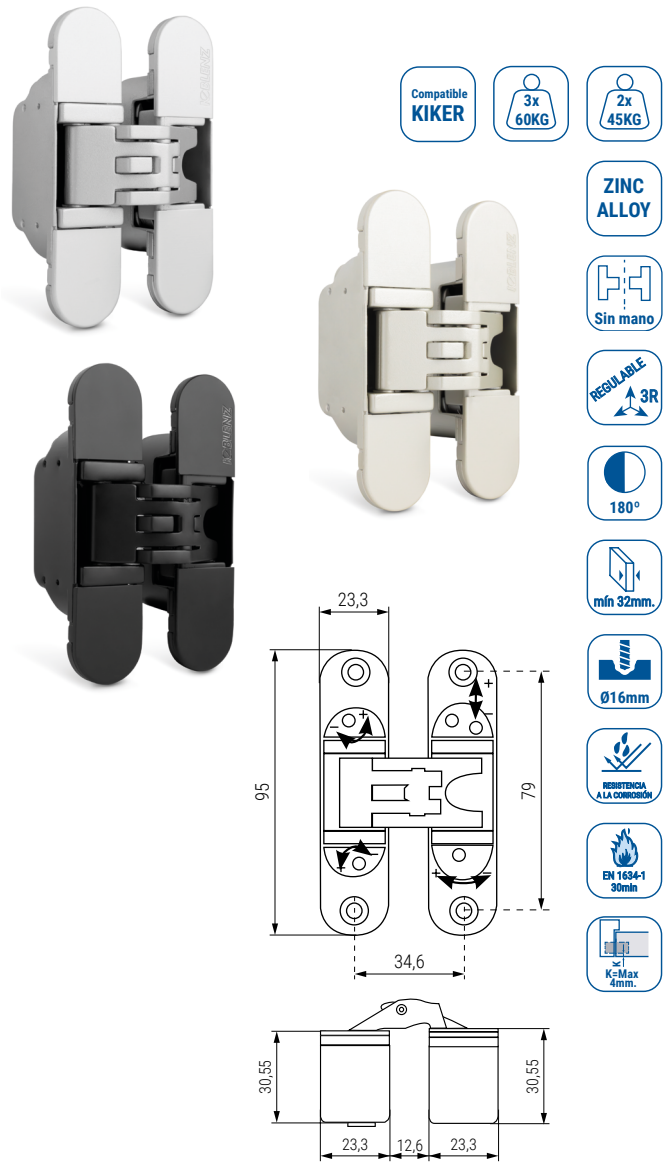

Vídeo de montaje
Assembly video

- Bisagra 5 pivotes regulables a través de 3 ejes:
 - Horizontal +3 / -2mm.
 - Vertical ±2,5 mm.
 - Plano ±1 mm.
 - Las regulaciones se deben efectuar en todas las bisagras de la puerta.
 - Bujes antidesgaste sin necesidad de lubricación ni mantenimiento.
 - Ideal para marcos de madera, acero y aluminio.
 - Tapas de aluminio.
 - Testado con cierrapuertas.
- Hinge with 5 adjustable pivots on 3 axes:
 - Horizontal + 3/ -2 mm.
 - Vertical ±2,5 mm.
 - Plane ±1 mm.
 - The adjustments must be made on all door hinges.
 - Anti-wear bushings without the need for lubrication or maintenance.
 - Ideal for wood, steel and aluminum frames.
 - Aluminium covers.
 - Tested with door closer.

Código Code	Material	Acabado Finish	
797.101	acero-zamak/steel-zinc alloy	níquel sat/satin nickel	3/27
797.111	acero-zamak/steel-zinc alloy	cromo sat/satin chrome	3/27
797.112	acero-zamak/steel-zinc alloy	negro/black	3/27

