




UNIDAD DE TRATAMIENTO DE AIRE COMPRIMIDO

SERIE EC - Filtro/Regulador + Lubricador




Modelo completo	Compuesto por		ESPECIFICACIONES				Accesorios unión
	Filtro - Regulador	Lubricador	*Caudal (l/min)	Conexión (G)	Rosca del manómetro	Peso (kg)	
EC1010-M5	EW1000	EL1000	90	M5	1/16	0,22	Y10T
EC2010-01	EW2000	EL2000	945	1/8	1/8	0,66	Y20T
EC2010-02			960	1/4			
EC3010-02	EW3000	EL3000	1874	1/4	1/8	0,98	Y30T
EC3010-03			1956	3/8			
EC4010-03	EW4000	EL4000	4923	3/8	1/4	1,93	Y40T
EC4010-04			5120	1/2			
EC5010-06	EW5000	EL5000	6000	3/4	1/4	3,2	Y60T
EC5010-10			6200	1			

* La información se basa en la presión de suministro de 8,0 bar y la presión de ajuste de 6,3 bar.
OPCIONES: 1. EIC para opción con manómetro integrado (añadir I intercalada en la referencia inicial).
2. Opción de filtraje 5 micras, especificando 5µ al final de la referencia.
3. Opción de purga automática, especificar D al final de la referencia.




EC

MEDIDAS 1010 - 2010:

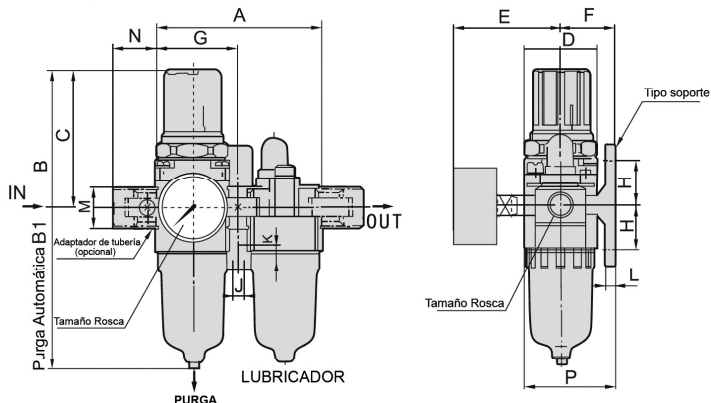

EIC

MEDIDAS 3010 - 5010:

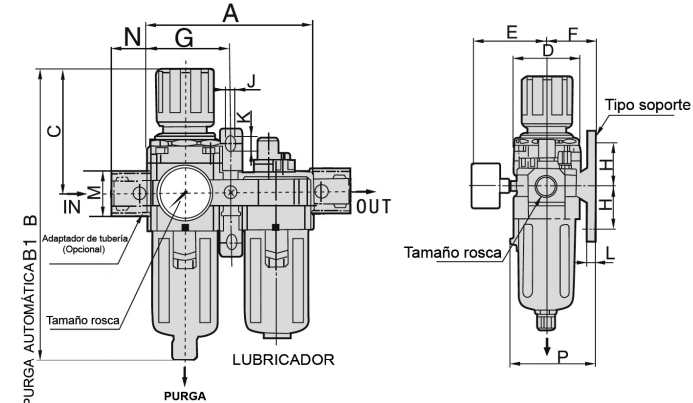

Tamaño	Tamaño Rosca	A	B	B1	C	D	E	F	G	H	J	K	L	M	N	P
EC1010	M5	58	109,5	-	50,5	25	26	25	29	20	4,5	7,5	5	17,5	16	38,5
EC2010	1/8"- 1/4"	90	164,5	202,5	78	40	56,8	30	45	24	5,5	8,5	5	22	23	50
EC3010	1/4"- 3/8"	117	211	224,5	92,5	53	60,8	41	58,5	35	7	11	7	34,2	26	70,5
EC4010	3/8"- 1/2"	154	262	265	112	70	65,5	50	77	40	9	13	7	42,2	33	88
EC5010	3/4"- 1"	195	338	341	116	90	75,5	69,8	97,5	50	12	16	10,5	55,2	40	115