
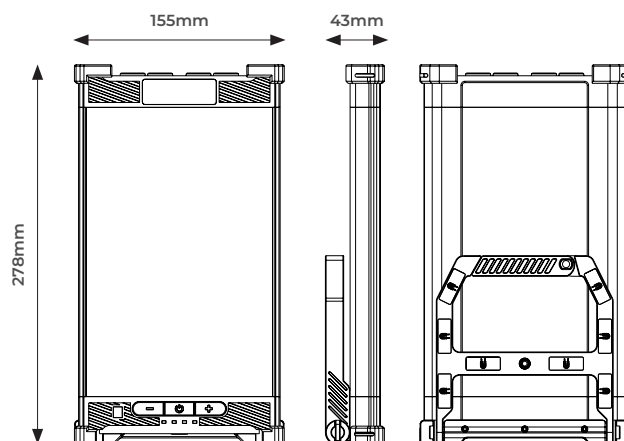


LUZ DE TRABAJO LED RECARGABLE DE ALTA RESISTENCIA

Características de Producto

- 2 fuentes de luz: Luz principal y el foco
- 3 modos de iluminación, incluyendo una luz roja de advertencia
- Batería de gran capacidad de 20.000 mAh, que proporciona una larga duración al producto
- Base con potentes imanes y abrazadera para fijarla a cualquier superficie
- Se puede montar en un trípode, sobre una superficie o colgarla con la abrazadera
- Linterna de trabajo de alta resistencia con clasificación de protección IK08
- Salida de batería externa USB integrada de 5 V y 1 A máx
- Cable USB tipo C de 1 m incluido

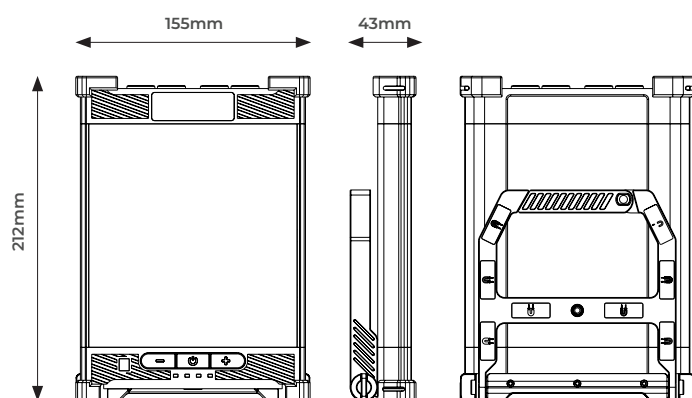

CAT NO.	LUMINARIA (LÚMENES)	POTENCIA (W)	EFICIENCIA (Lm/W)	PESO (kg)	DIMENSIONES (mm)	CRI	RATIO IK	TENSIÓN DE ALIMENTACIÓN
LILHD10GCC	1300	20	65	0.886	212x155x43	>80	IK08	220 - 240V
LILHD15GCC	2100	30	70	1.185	278x155x43	>80	IK08	220 - 240V

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-4	Luminaires – Portable
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

